

TECHNICAL DATASHEET

WALL of STONE

PRODUCT NAME/CODE

**SMALL SQUARE BLACK COPPER
AS 0101**

DIMENSIONS (+/-2%)

100 x 100 cm

PANEL THICKNESS / PATTERN DEPTH

3 mm / 19 mm

WEIGHT

6,6 kg/m²

DENSITY

1600 kg/m³

COVERAGE AREA DEPTH


1 m² /panel

FIRE CLASS RATE

A2s1d0 EN 13501-1

THERM. EXPA. COEF

0.00005mm/Mk

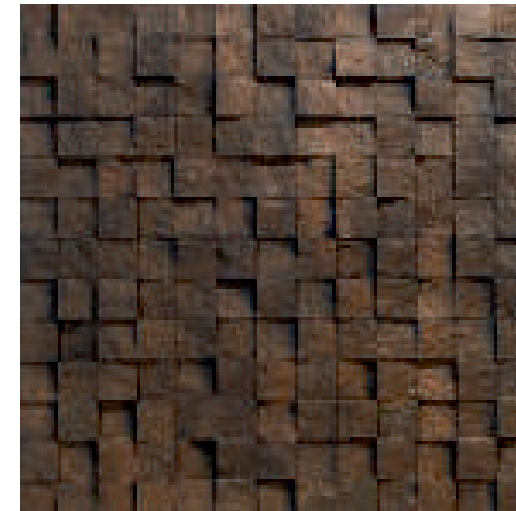

DETAILED ASSEMBLY INFORMATION

Product dimensions are 100 cm X 100 cm and will cover 1 m² area. Since the products are square, they should be laid in order from top to bottom or right to left. Because of the pattern each side has different thickness when you apply do not forget to turn right or left the product. Panels may be screwed with appropriate screws directly on bricks, rough-cast walls, and materials such as OSB, MDF, concrete panels, aqua panels or Gypsum panels etc. It is suitable to lay on plaster profiles only for Plaster Board. Products can be cut and sized by means of jigsaws and spiral grinding. Screw heads and joints are filled with sealant paste and corrected by thin brush and spatulas. The section where the mastic paste is applied are closed with joint and retouch paint and the procedure is completed. Gaps are filled with sealant paste.

ACRYLIX

www.wallofx.com

TECHNICAL DETAIL SPECIFICATIONS

| | |
|---------------------|---|
| RAW MATERIAL | Mineral powder and liquid water based natural resin |
| INGREDIENT | 70% mineral powder and resin, 20% high quality carbon fiber, 10% natural stone powders |
| COMPOSITION | It does not cause odor or pose carcinogen risk unlike synthetic or other solvent based products |
| HEAT | Does not cause stretching, breaking, cracking or melting in any way between - 40 Cel. and + 90 Cel |
| DESCRIPTION | Ready to use decorative natural look flexible wall covering |
| USAGE AREA | Interior and exterior wall and ceiling covering, facade cladding panels |
| WARRANTY | Finished product have 30 years of warranty in exterior environments due to the binder and natural minerals inside |
| FLEXIBILITY | The panels are flexible |
| CLEANABILITY | It can be wiped, washed and may be painted again to the desired color |
| ISOLATION | Not affected by water and humidity. It also has acoustic properties. It absorbs a certain level of sound and prevents echoing |
| UV | It has UV resistance and is not affected by sunlight. It reacts the same way as natural materials |
| SMELL | It can be used safely in indoor and outdoor spaces since it is odorless |

SMALL SQUARE BLACK COPPER AS 0101



SMALL SQUARE GOLDEN LEAF AS 0102



SMALL SQUARE SILVER AS 0103




SMALL SQUARE SILVER LEAF AS 0104



SMALL SQUARE FUME AS 0105



SMALL SQUARE WALNUT AS 0106



SMALL SQUARE BLACK SILVER AS 0107

